

# BREAKTHROUGH WATERPROOF. WATERTIGHT FROM EVERY ANGLE.



## KEY FEATURES

### High Security

The most secure sensor technology available. Numerous built-in antispoofting measures.

### High Performance

Unequaled "Ability to Acquire". Capitalizing upon the AuthenTec 'True Print' technology, difficult fingers are a thing of the past. Industry's best FAR/FRR.

### Premium Reliability and Safety

Utilizing 'RUN!' this unit achieves unparalleled maintenance free operation. 'RUN!' is a proprietary Hardware/Software Design that optimizes Error Handling, ESD Detection, and Safety Management.

### Superior Image Quality

E-Field approach results in a high-quality image that creates reliable authentication. These images ensure we capture everyone, everytime under virtually all conditions.

### Ultra-Robust Packaging

From the Scratch Resistant Sensor to the rugged and impermeable casing, this reader is designed for harsh environments.

## P4000<sup>WP</sup> | Waterproof Fingerprint Reader

IDEAL FOR HARSH ENVIRONMENTS.

Incorporating a unique and unmatched waterproofing technique, this standalone USB Fingerprint Reader is proven, reliable, and intended for the most rigorous and demanding of applications.

Utilizing AuthenTec's AES4000 sensor, the most successful fingerprint technology in the market, the P4000 offers superior performance - from acquiring difficult fingers to handling spilled coffee!

Incorporating 'RUN!' a Proprietary performance enhancing technique this unit achieves unmatched uptime and trouble free operation.



**Verifi**  
Fingerprint Products




Zvetco Biometrics  
Orlando, FL 32807  
www.everifi.com

6820 Hanging Moss Rd  
PH: 407-681-0111

P 099A5 012605 P1 RE

# P4000<sup>WP</sup>

## WaterProof Fingerprint Reader

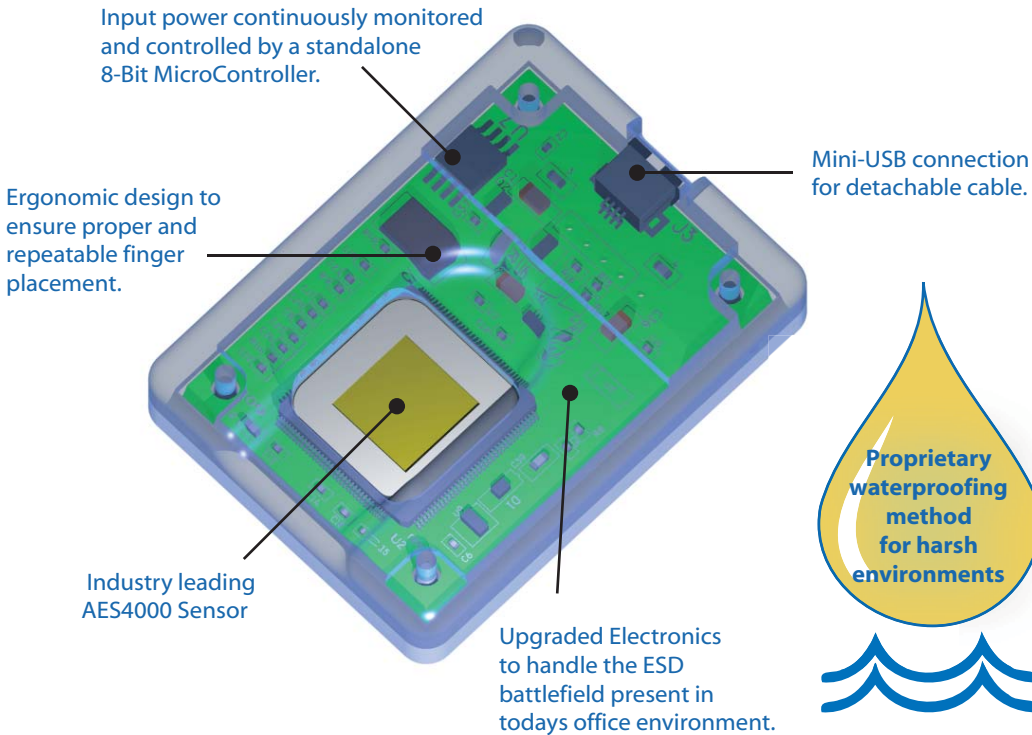

### FEATURES

<b>Sensor</b>	AuthenTec AES4000 EntrePad with 'True Print' technology. 250dpi image density. High-rate USB frame capture.
<b>Housing</b>	Solid Aluminum Construction with commercial grade powder coat finishing which provides unparalleled scratch resistance, durability, and protection.
<b>'RUN!' ERROR HANDLING</b>	A Proactive Error Handling Layer that is transparent to the end user and practically eliminates calls for technical support. This, microprocessor based system, automatically detects and corrects PC/USB instabilities.
<b>Reinforced Mechanical Support</b>	A unique mechanical support innovation minimizes flexing of the sensor electronics even under extreme pressures. This feature significantly increases the products reliability even with repeated stressful use.
<b>Thermal Protection</b>	Continuous Power Monitoring and the use of a resettable fuse provide a two step thermal protection, guaranteeing safe operation under all conditions.
<b>ESD Suppression</b>	A Multi-point suppression strategy ensures the quickest and most complete reaction to ESD overvoltage events, maximizing up-time and preventing damage.
<b>Size and Weight</b>	2.5" X 2" X 0.75". 3 ounces.
<b>Communication</b>	USB
<b>Cable</b>	A detachable 6 ft. shielded USB cable with ferrite bead is supplied. Various lengths are available.

### CUSTOMIZATION

- Custom Colors Available:  
Black, Blue, Green, Red  
(Virtually any Color upon request)
- Custom Logo Marking:  
Your own Logo including graphics and text can be Lasered on the reader.  
(upon request)

### SDK AVAILABILITY

- Software Developer's Kit (SDKs) are available for Independent Software Developers who wish to develop products that interface with the P4000WP.

### APPLICATION REQUIREMENTS

- Windows 98, 2000, ME, or XP.

### PRODUCT SUPPORT

- A full range of hardware, software, and design services, including advanced sensor control and fingerprint matching algorithms.

### AUTHENTEC 'TRUE PRINT'

- A unique, patented imaging technology. During imaging, a small signal is generated between the IC and the finger's live layer. More than 9,000 elements work as an antenna array creating a digital pattern that mimics the fingerprint's underlying structure.

FOR MORE INFORMATION. VISIT  
[www.everifi.com](http://www.everifi.com)